


Client: Laois Co Co
 Works: Road Reinstatement

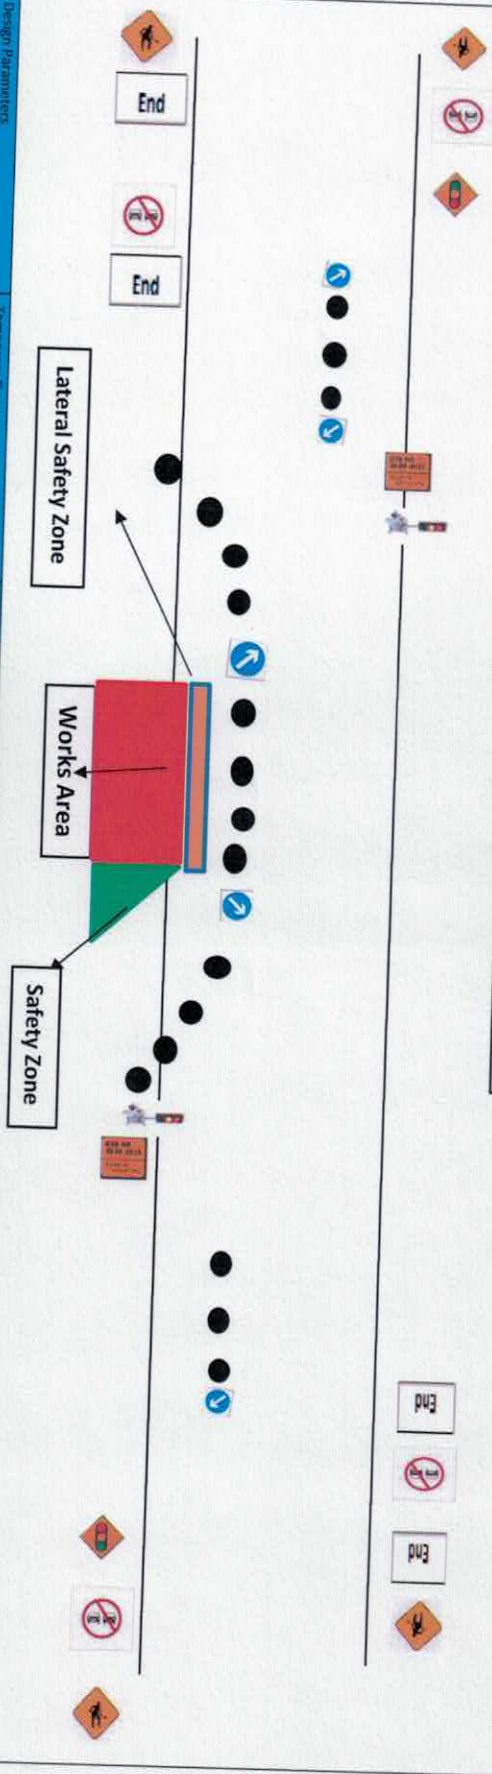

Design Parameters		Temporary Signs		Cone Spacing		Notes					
Road Class	Level 3 (I)	Visibility	90m	Taper	3m	1. All work to be carried out in accordance with local authority requirements.					
Works Type	Type B	No. Of Approach Signs	3/4	Longitudinal	12m	2. Daily inspection & maintenance of T.M setup to be carried to ensure the safety and integrity of the T.M setup.					
Speed Limit	80 kph	Sign Spacing	120m	Cone Height Min	750mm	3. All T.M systems to be setup in accordance with Chapter 8 regulations with respect to signing lighting and guarding.					
Rate of Tapers		Cumulative Distance		Minimum Lane Widths		4. All signs used will conform to those specified in the TM Plan and also conform to TSD regulations.					
Lane Taper	1 in 40	Minimum size of signs	600 x 600	Driving Lane	3m	5. Contractors shall be responsible to provision of any access ramps due to height variations in any paved surfaces as a result of works.					
Shoulder Taper	N/A	Safety Zones		Length of Diversion Route		6. TM Plans do not take into consideration underground services.					
Subbank	N/A	Longitudinal	12m	Diversion Route	N/A						
Transition	N/A	Lateral	1.2m								
Contractor		Legend									
Coogan Plant Hire		RUS 001/002	Keep Right/Left	Temp Traffic Signals WK 060	Cones 750mm	Works Detail Traffic Volume		Reinstatement Works	3 min count =	RSCS Works Start Date	Coogan Plant Hire June 2022
		WK 001	Men @ Work	Cones 750mm		Plan Date		07/06/22		Designer	Robert Coogan
		No Overtaking RUS 014		Supplementary Sign P10		Notes				Signed	Rob Coogan